



Super Finish 23 Pro



PRODUCT INTRODUCTION
The SF 23 Pro

SUPERFINISH 23 PRO HEA SPRAYPACK

240v Airless spraying system

FOR PERFECT RESULTS WITH MAXIMUM CONTROL THANKS
TO INNOVATIVE AIRLESS DIAPHRAGM TECHNOLOGY

HEA | HIGH EFFICIENCY
AIRLESS

SI Paint Hopper
Available separately




Flexible Suction Hose:

for direct intake from original container.
Fine mesh filter for trouble free working.

Superb Spray Surface Quality: with
the Vector Pro Airless gun. Lightweight,
comfortable spray gun with a long
service life. HEA 519 tip included.



HEA Pressure Gauge: allows monitoring
of the spray device pressure. HEA nozzles
allow work in the low-pressure range
(ideally at 80 - 140 bar) that is marked with
green on the pressure gauge

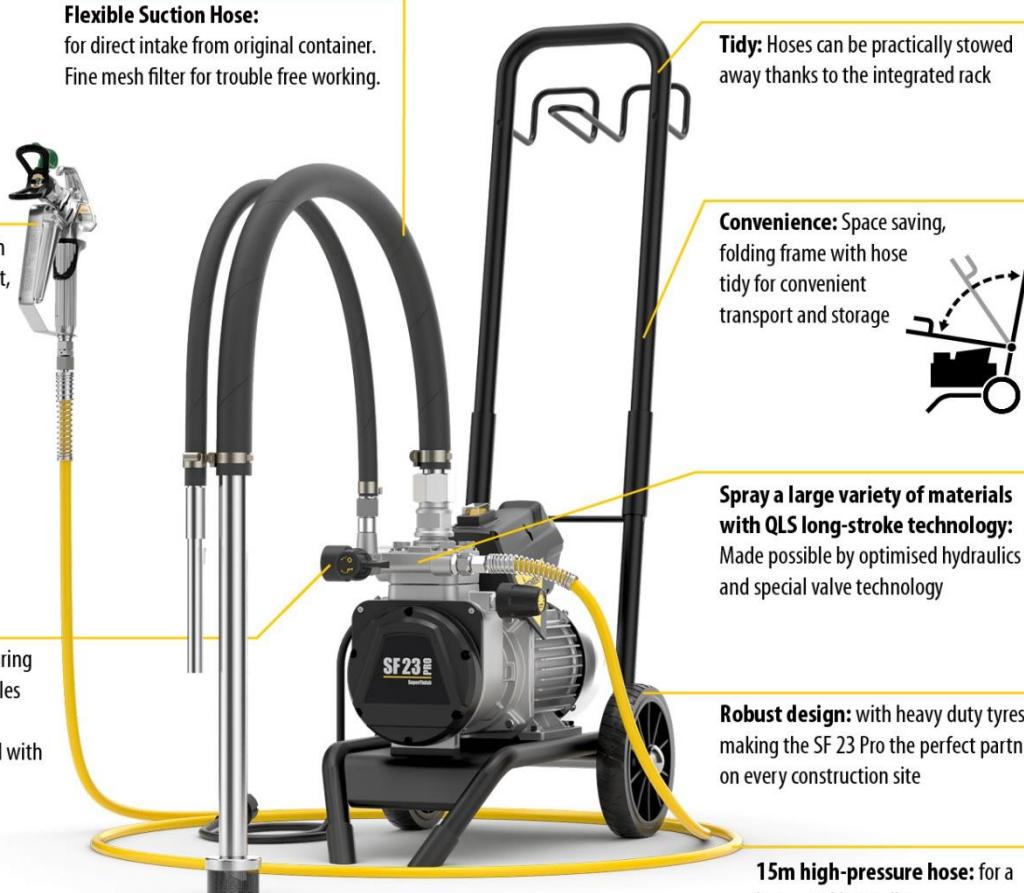

Tidy: Hoses can be practically stowed
away thanks to the integrated rack



Convenience: Space saving,
folding frame with hose
tidy for convenient
transport and storage

**Spray a large variety of materials
with QLS long-stroke technology:**
Made possible by optimised hydraulics
and special valve technology

Robust design: with heavy duty tyres
making the SF 23 Pro the perfect partner
on every construction site

15m high-pressure hose: for a
large working radius



EXTENDED GUARANTEE

Register online for up to 5 years' peace of mind


WAGNER

GERMAN
ENGINEERING

WAGNER

Performance Specification - SF 23 Pro

Specification	SF 23 Pro
Technology	Diaphragm Pump
Power unit	Electrical
Voltage	230V / 110V
Power input unit [kW]	1.3 kW
Max. delivery rate	2.6 L / min
Max. operating pressure [bar]	25 MPa / 250 bar
Max. nozzle size [inch]	0.023"
2-position car	No
Max. viscosity	20,000 mPas
Weight	27kg
Protection class	IP54
Max noise level	70 db(A)
Max hose length	Up to 20m + 2.5m hose whip

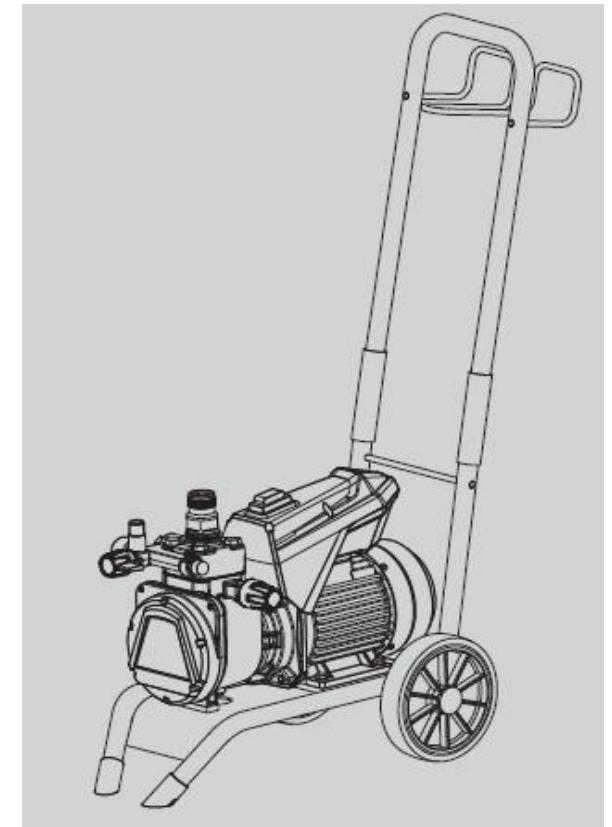



WINNOVATORS SINCE 1947